



TLE23004B



※only with TLE03501B


TLE23004B+TLE01501B/TLE03501B/TLE04501B Aqua-auto faucet(single)

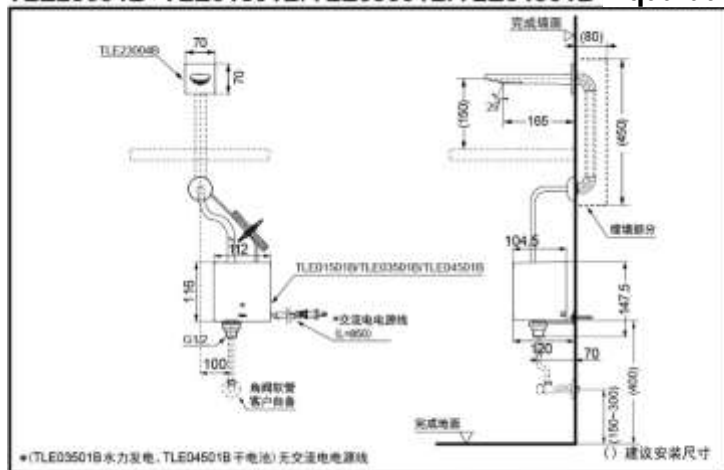

※(TLE03501B水力发电, TLE04501B干电池) 无交流电源线

TOTO(CHINA) CO.,LTD. All rights reserved.

**TLE23004B+TLE01501B/TLE03501B/TLE04501B
+TLE05701B Aqua-auto faucet(thermal)**

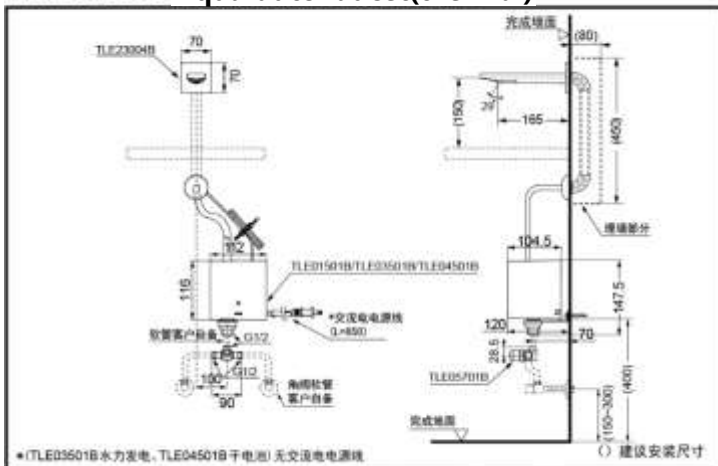

※(TLE03501B水力发电, TLE04501B干电池) 无交流电源线

TOTO(CHINA) CO.,LTD. All rights reserved.

TOTO(CHINA) CO.,LTD. www.toto.com.cn

FEATURES

- Beautiful appearance, generous.
- Beautiful shape, noble quality
- It is easy to install and use
- The unique bubble spitting technology makes the water flow smooth and strong.
- 1.3L water can save water and bring more comfortable experience

SPECIFICCS

Water Inlet Requirement :
0.05MPa(Dynamic Pressure)
~0.75MPa(Static Pressure)

Water Efficiency : Grade 1
Drainage accessory :
not included

Operating temperature :
1~55°C

Detection range: ≤250mm

OTHERS

Recommend fittings :

Functional Part:

TLE01501B(AC)

TLE04501B(DC)

TLE03501B(HYDRO ELECTRIC
POWER)

Thermostatic : TLE05701B