

PRODUCT SPECIFICATIONS

The NEOREST WX2 with the TORNADO FLUSH system toilet shall be 4.5LPF / 3.0LPF .Toilet shall have CEFIONTECT ceramic glaze. Top Unit shall have EWATER+ auto-cleans wand , bowl , and under-seat with auto open and close lid.

FEATURES

- TORNADO FLUSH® System utilizes 360° cleaning power to reach every part of the hole-free rim design bowl
- ACTILIGHT® clean light cleaning system built in lid
 - CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
 - EWATER+® auto-cleans wand, bowl, and under-seat
 - PREMIST® on bowl before each use
 - Ultra high-efficiency dual flush function - 4.5L/3.0L
 - Gentle Aerated, Warm Water, Dual Action Spray with oscillating and pulsating feature
 - Auto lid open/close
 - Auto flush
 - Automatic air deodorizer
 - Heated Seat with Temperature Control
 - Warm Air Dryer function
 - Adjustable spray position
 - Programmable energy saver system
 - Multifunctional horizontal remote control
 - Energy save timer
 - Soft Light
 - Smooth seam seat design eliminates the gap under the seat

COMPONENTS

CES9E480GCN

- CW928PVB#NW1 Wall Hung Bowl Unit
- TCF9E480GCN#W Functional unit
- WH175BAT In Wall Tank Unit
- MB177M#S Flush Plate Unit

COLORS

- Nickel




TECHNOLOGY & INNOVATION HIGHLIGHTS

- | | |
|--|---|
|  ACTILIGHT |  CEFIONTECT |
|  EWATER+ for WAND |  TORNADO FLUSH |
|  EWATER+ for BOWL |  RIMLESS |
|  EWATER+ for UNDER SEAT |  WATER SAVING |
|  AIR-IN WONDER-WAVE |  AUTO OPEN/CLOSE LID |
|  WARM AIR DRYING |  AUTO FLUSH |
|  HEATED SEAT |  PREMIST |
|  DEODORIZER | |

CODES/STANDARDS

· Please refer to the label for product standards.

DIMENSIONAL DRAWINGS

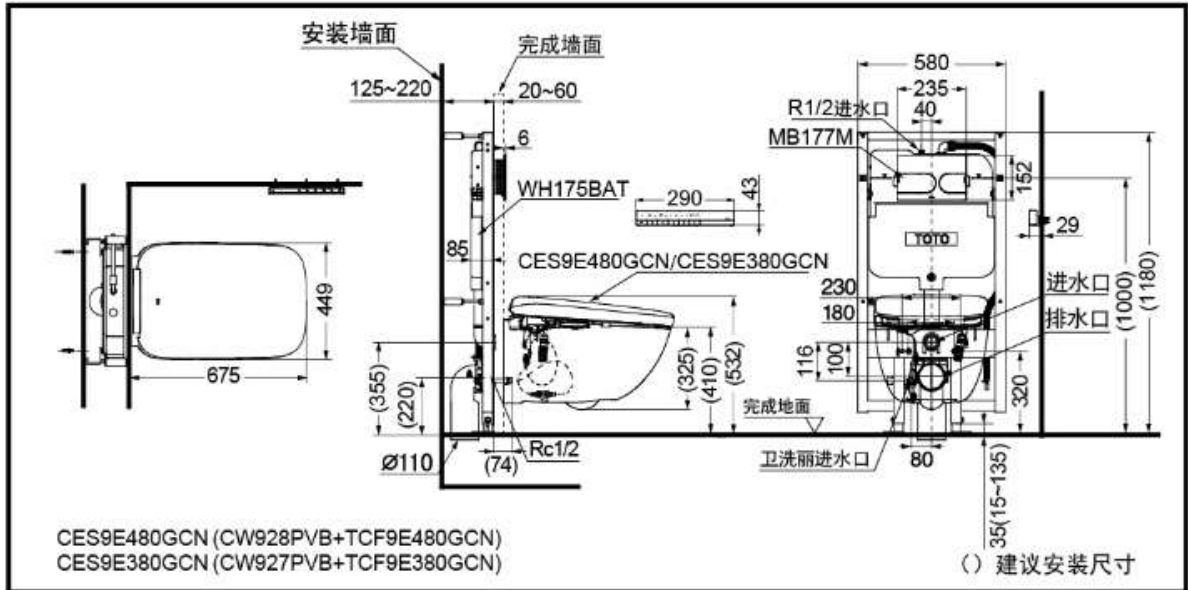

SPECIFICATIONS

CES9E480GCN		
额定电源	AC220V.50Hz	
额定功率	834W	
最大功率	1452W<进水温度0°C时>	
温水加热方式	瞬间式	
电源线长度	0.5m	
防水保护等级	IPX4	
水效等级	2级	
进水压力	最低必要水压：0.05MPa<流动时>	
	最高水压：0.75MPa<静止时>	
进水温度	0-35°C	
使用温度	0-40°C	
产品尺寸	宽449mm×长675mm×高447mm	
产品重量	约46kg(机能部约10kg, 便器36kg)	
便器部		
坐便器	冲洗水量	大4.5L, 小3.0L
	名义冲水量	3.5L
	进水方式	隐藏式水箱
	冲洗方式	TORNADO FLUSH(冲落式)
	尺寸	加长型

机能部			
洗净装置	喷水量	臀部洗净：0.4L/min	
		臀部轻柔洗净：0.4L/min	
		下身洗净：0.4L/min	
		下身护理洗净：0.4L/min	
	水势调节	5档	
吐水温度	温度调节范围：关·约30-40°C		
加热器功率	1200W		
安全装置	温度保险丝		
防逆流装置	真空开关, 止回阀		
加热便座	表面温度	温度调节范围：关·约28-36°C	
		自动节电时：约26°C, 超级节电时：关	
	加热器功率	59W	
安全装置	温度保险丝		
除臭装置	方式	O2除臭	
	风量	标准模式：约0.09m³/min	
		强力模式：约0.16m³/min	
功率(耗电量)	标准模式：约1.6W		
温风干燥	风量	强力模式：约4.0W	
		温度调节范围：约35-60°C	
	加热器功率	约0.25m³/min	
	安全装置	261W	
		温度保险丝	